

Metsä

Spruce 140 US Center-cut

Datasheet updated: 26/01/2026

Our portfolio consist wide selection of standard dimensions in compliance with the Nordic quality grading for sawn. As material, spruce sawn timber are easy to work and surface-treat. Spruce sawn timber is a particularly good material for high-quality carpentry products. These products are typically made of U/S and V grade timber, the two highest qualities.

Our spruce sawn timber is produced at our Renko and Vilppula sawmills in Finland, using wood from sustainably managed forests.

Spruce characteristics (KD 12%)

Density	300-470 kg/m ²
Modulus of elasticity	10,000 N/mm ²
Bending strength	87 N/mm ²

Spruce 140 US Centercut quality characteristics


Dimensional accuracy	Thickness -1 + 3 mm Width -2 + 4 mm Length -1 + 20 mm
Knot size - primary face	Sound knot 20-25% of the width Dry knot 50% of the sound knot 4 knots per meter allowed
Knot sizes - edge	Sound knot 50-60% of the thickness Dry knot 50% of sound knot 2 knots per meter allowed
Shake	Short shake 15-25% of length allowed Shakes going through the piece not allowed
Other defects	No blue stain, insect damage or wane allowed Max two 50-60 mm resin pockets allowed in worst meter
Distortion	25-45 mm: Bow 15 mm, spring 6 mm, twist 10% of product width / worst 2 m 45-100 mm: Bow 10 mm, spring 6 mm, twist 8% of product width / worst 2 m
Moisture	Normal dry product Target moisture 18 +/-2%
Applications	Paneling and mouldings Furniture Window frames



Shipping mark

Metsä

Best knot quality. Majority sound knots, dry knots 50% of sound knot side. No bark ringed knots allowed.

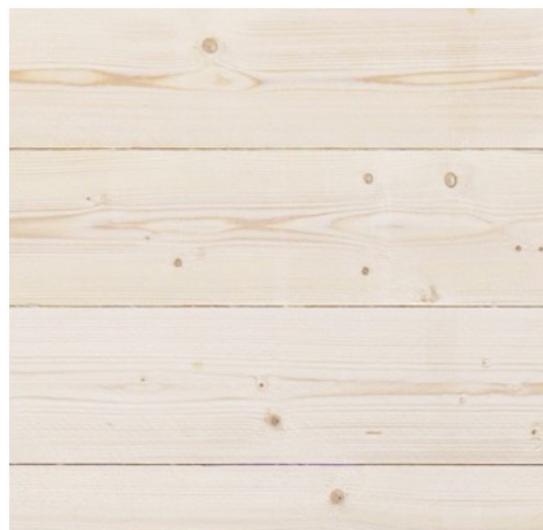

Metsä

Spruce 140 US Center-cut

Package label explanation

- 1 IPPC mark
- 2 Last 6 digits of package number and storage location in mill
- 3 Dimension and quality
- 4 Volume, min – max length and weight
- 5 Species, product code and moisture content
- 6 Pieces per length, total pieces, running meters, volume
- 7 Full 10 digits package number, dimension, quality, product code and volume

Package label



Package

Height	80 – 120 cm
Width	90 – 120 cm
Length	2100 – 5400 mm
Gross weight	Max 4000 kg
Wrappers	Plastic hood or wrap, recyclable plastic
Bands	2100 – 3900 mm min 3 plastic bands; 4200 – 6000 min 4 plastic bands
Markings	Shipping marks
Identification	Package label + stamp on the end of the lumber (package number)
Other	Packages with non full top layer will have uneven surface sticker

