

MetsäBoard Pro FBB CX

PRODUCT SHEET



Product description

Fully coated paperboard, top coating contains OBA

End use


Cigarettes

Features

Printing method
Metsä Board mill

Gravure, Offset, Flexo
Tako, Äänekoski, Kyro

Structure

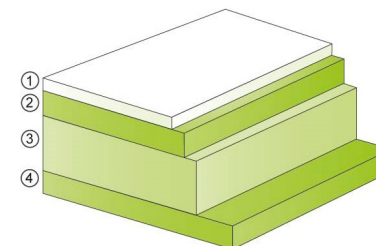

- 1) Multiple blade coating
- 2) Bleached chemical pulp
- 3) Chemi-thermo-mechanical pulp (CTMP)
- 4) Bleached chemical pulp

PROPERTY, UNIT	METHOD	STANDARD	TOLERANCE	VALUES
Grammage		ISO 536	± 4%	190 200 210 220
Thickness µm		ISO 534	± 4%	290 305 330 350

Tolerances, when specified, are based on 95% confidence limits on mill measurements of samples tested in standard conditions (23°C/50% RH).

Metsä Board Paperboard mills have FSC® / C001580 and PEFC / 02-31-92 CoC certificates.

*Please contact Metsä Board for details of grammage and / or country-specific, restrictions and limitations.

Issued 1.11.2023. Supersedes sheet dated 17.05.2022.