

# MetsäBoard Pro FBB CX

## PRODUCT SHEET



### Product description

Fully coated paperboard, top coating contains OBA

### End use


Cigarettes

### Features

Printing method  
Metsä Board mill

Gravure, Offset, Flexo  
Kyro, Äänekoski

### Structure

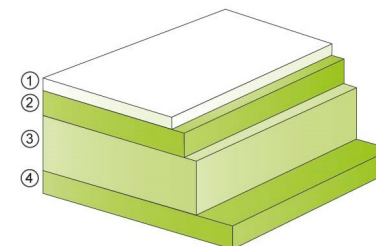

- 1) Multiple blade coating
- 2) Bleached chemical pulp
- 3) Chemi-thermo-mechanical pulp (CTMP)
- 4) Bleached chemical pulp

| PROPERTY, UNIT            | METHOD | STANDARD | TOLERANCE | VALUES |     |     |     |
|---------------------------|--------|----------|-----------|--------|-----|-----|-----|
| Grammage g/m <sup>2</sup> |        | ISO 536  | ± 4%      | 190    | 200 | 210 | 220 |
| Thickness µm              |        | ISO 534  | ± 4%      | 290    | 305 | 330 | 350 |

Tolerances, when specified, are based on 95% confidence limits on mill measurements of samples tested in standard conditions (23°C/50% RH).

Metsä Board Paperboard mills have FSC® / C001580 and PEFC / 02-31-92 CoC certificates.

\*Please contact Metsä Board for details of grammage and / or country-specific, restrictions and limitations.

Issued 1.11.2023. Supersedes sheet dated 17.05.2022.