

MetsäBoard Classic WKL

PRODUCT SHEET



Product description

Coated white top kraftliner


End use

Retail-ready packaging, Foods, Beverages,
Consumer electronics, Consumer durables, General
packaging

Features

Printing method Flexo postprint, Digital inkjet
Food contact EU Regulation (EC)
No 1935/2004,
USFDA21CFR§176.170*,
USFDA21CFR§176.180*
Metsä Board mill Kemi

Structure

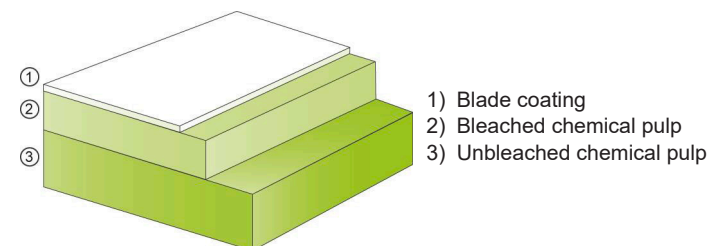

PROPERTY, UNIT	METHOD	STANDARD	TOLERANCE	VALUES
Grammage g/m ²		ISO 536		135 160 175
Basis weight lbs/1000ft ²				28 33 36
Caliper pt		ISO 534		5.5 6.5 7.3
Thickness µm		ISO 534		140 165 185
SCT CD lbf/in		ISO 9895		16 18 19
Moisture content %		ISO 287		7.0 7.0 7.0
Smoothness top µm	PPS10	ISO 8791-4		3.5 3.8 4.0
Internal Bond ft.lbs/1000in ²		TAPPI T 569		167 167 167
Brightness top %	Illumination C/2°	ISO 2470-1		79 79 79
Water absorption top 1 min g/m ²	Cobb 1 min	ISO 535		32 32 32
Gloss %	Hunter 75°	ISO 8254-1		30 30 30

Tolerances, when specified, are based on 95% confidence limits on mill measurements of samples tested in standard conditions (23°C/50% RH).

Metsä Board Paperboard mills have FSC® / C001580 and PEFC / 02-31-92 CoC certificates.

*Please contact Metsä Board for details of grammage and / or country-specific, restrictions and limitations.

Issued 01.10.2023. Supersedes sheet dated 04.06.2020.