

MetsäBoard Prime FBB CXB

PRODUCT SHEET



Product description

Fully coated paperboard with coated reverse side, top and reverse side coating contains OBA


End use

Cigarettes, Beautycare

Features

Printing method Gravure, Offset, Flexo
Metsä Board mill Tako, Äänekoski, Kyro

Structure

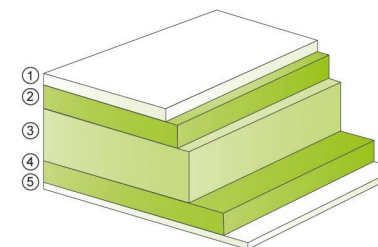

- 1) Multiple blade coating
- 2) Bleached chemical pulp
- 3) Chemi-thermo-mechanical pulp (CTMP)
- 4) Bleached chemical pulp
- 5) Light weight coating

PROPERTY, UNIT	METHOD	STANDARD	TOLERANCE		VALUES
Grammage		ISO 536	± 4%	240	260
Thickness µm		ISO 534	± 4%	350	360

Tolerances, when specified, are based on 95% confidence limits on mill measurements of samples tested in standard conditions (23°C/50% RH).

Metsä Board Paperboard mills have FSC® / C001580 and PEFC / 02-31-92 CoC certificates.

*Please contact Metsä Board for details of grammage and / or country-specific, restrictions and limitations.

Issued 17.05.2022. Supersedes sheet dated 02.07.2020.