

# MetsäBoard Prime FBB CXB

## PRODUCT SHEET



### Product description

Fully coated paperboard with coated reverse side, top and reverse side coating contains OBA

### End use


Cigarettes, Beautycare

### Features

Printing method  
Metsä Board mill

Gravure, Offset, Flexo  
Kyro, Äänekoski

### Structure

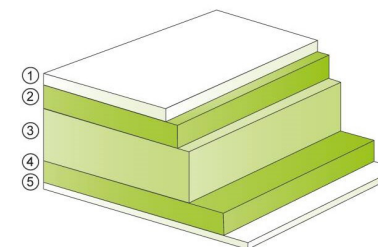

- 1) Multiple blade coating
- 2) Bleached chemical pulp
- 3) Chemi-thermo-mechanical pulp (CTMP)
- 4) Bleached chemical pulp
- 5) Light weight coating

PROPERTY, UNIT	METHOD	STANDARD	TOLERANCE	VALUES
Grammage g/m <sup>2</sup>		ISO 536	± 4%	<b>240</b>
Thickness µm		ISO 534	± 4%	<b>350</b>

Tolerances, when specified, are based on 95% confidence limits on mill measurements of samples tested in standard conditions (23°C/50% RH).

Metsä Board Paperboard mills have FSC® / C001580 and PEFC / 02-31-92 CoC certificates.

\*Please contact Metsä Board for details of grammage and / or country-specific, restrictions and limitations.

Issued 4.12.2025. Supersedes sheet dated 17.05.2022.